

# "Full Silver" Intermittent Duty PowerSeal CONTACTOR

The PowerSeal is a sealed DC Contactor that gives you a high performing product at a very competitive price. The PowerSeal unit is available in 12v, 24v, 36v, and 48v coils.



## Features

- SPST DC Contactor
- Patented Product Design
- IP66 and IP67 Rated
- Choice of 12v, 24v, 36v, and 48v coil operation
- Choice of various mounting bracket options

## Applications


- Hydraulic Power Pack
- Electric Vehicles (Golf Carts, Pallet Jacks, Forklifts)

**TROMBETTA**   
DC Power Solutions for a Harsh World

414-410-0300 • [trombetta.com](http://trombetta.com)

684-XXXX-232

Current vs Time To Reach Max Rated High Current Stud Temperature

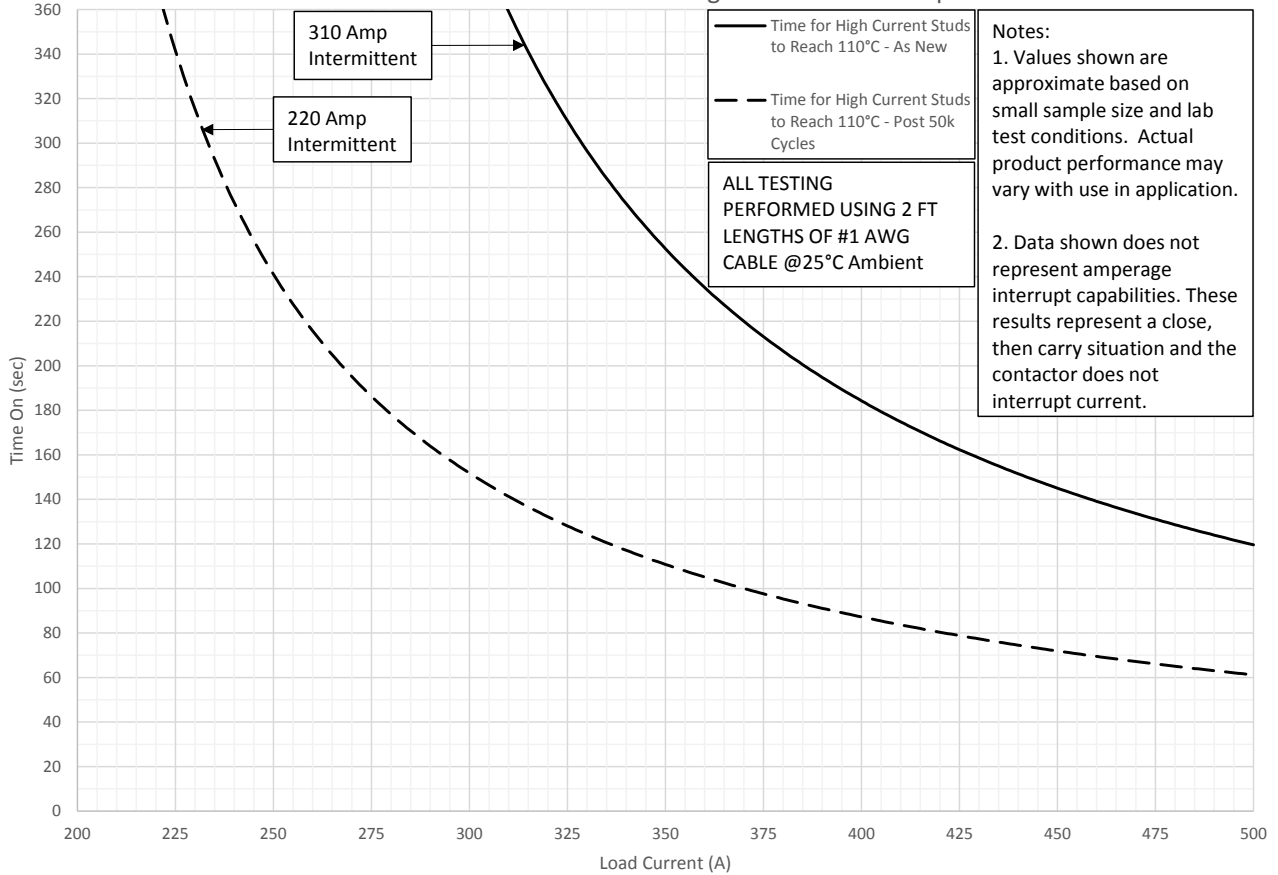

**Electrical Parameters @ 25° C**

<b>Coils</b>	<b>12 V</b>	<b>24 V</b>	<b>36 V</b>	<b>48 V</b>
Max Sustained Duty Cycle	25%	25%	25%	25%
Max On-Time	6 min			
Pull-In Voltage (VDC)	8.25	16.5	24.75	33
Hold Voltage (VDC)	3.5	7	10.5	14
Coil Resistance (Ohms)	5.5	21	48	86
<b>Contacts</b>				
Inductive Load Carry/ Interrupt (Amps)	310/300	310/300	310/225	310/225
Peak Inductive In-Rush Capability (Amps)	1,000	1,000	600	600
Electrical Cycle Life	50,000	50,000	50,000	50,000
Contact Material	Copper w/silver alloy contact buttons			

**Mechanical Parameters**

Coil Terminals	10-32 Studs
Contact Studs	5/16-24 Studs
Mounting Bracket	Various Options Available

**Environmental**

Operating Temperature Range	-40° C to 85° C
Sealing	IP66 and IP67

Note: For additional best practices and application details contact Trombetta or reference our application guide.